

# TW1000-100G-32 Booster Station

## 3 Horsepower – 220 VAC

## Large Residential/Commercial

### Applications: City – Well – Cistern – Irrigation – NFPA-13D

VARIABLE SPEED CRUISE CONTROL FEATURE

PUMP WILL AUTOMATICALLY MAINTAIN DESIRED PRESSURE

PAINTED STEEL FRAME

EMERSON


CONTROLLER

Pneumatic Tank

Tank can be placed anywhere. Plumb on discharge Tank Tee on either side.

DISCHARGE

CHECK VALVE  
ON SUCTION

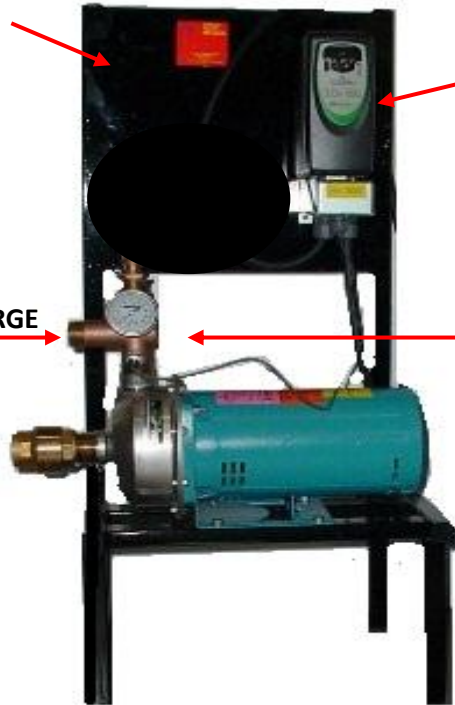

#### Specifications:

Pump: Gould Pump Co. #2MS1H2A0

Controller: Emerson

Assembler: Towle Whitney LLC

Power Options:

208-220V/1 Phase/30Amp

208-220V/3 Phase/15Amp

360-480V/3 Phase/15Amp

HP: 3 HP

Discharge: 1 ¼"

Suction: 1 ½"

Flow Rate: 100 GPM

Boost: 32 PSI overboost

Tank: Flotec FP7110T

Floor Model

All parts shown Included

Some Assembly Required

Footprint: 19"W x 19"D x 45"H

TOWLE WHITNEY LLC

Email: [ned@towle-whitney.com](mailto:ned@towle-whitney.com)

Web: [www.towle-whitney.com](http://www.towle-whitney.com)

Toll Free: 800-807-9827

Tel: 603-626-7371

Fax: 603-626-7372

Quiet  
Powerful  
Compact

Feet of  
Head



Actual system may vary from picture

Warrantees are passed through and as published in the Original Equipment Manufacturer's literature that is included with this system. In no event shall Towle Whitney LLC be liable for incidental or consequential damages, or limitation on how long an implied warranty lasts. It being intended that purchaser's exclusive remedy is limited to replacement of defective products. Water damage exclusion: It is understood that Towle Whitney LLC accepts no responsibility for water damage regardless of what or who caused water damage or any consequential personal injuries, liabilities or property damages resulting.