

TW1000-30W-70 Booster Station


2 Horsepower – 220 VAC

Large Residential/Commercial

Applications: City – Well – Cistern – Irrigation – NFPA-13D

VARIABLE SPEED CRUISE CONTROL FEATURE

PUMP WILL AUTOMATICALLY MAINTAIN DESIRED PRESSURE

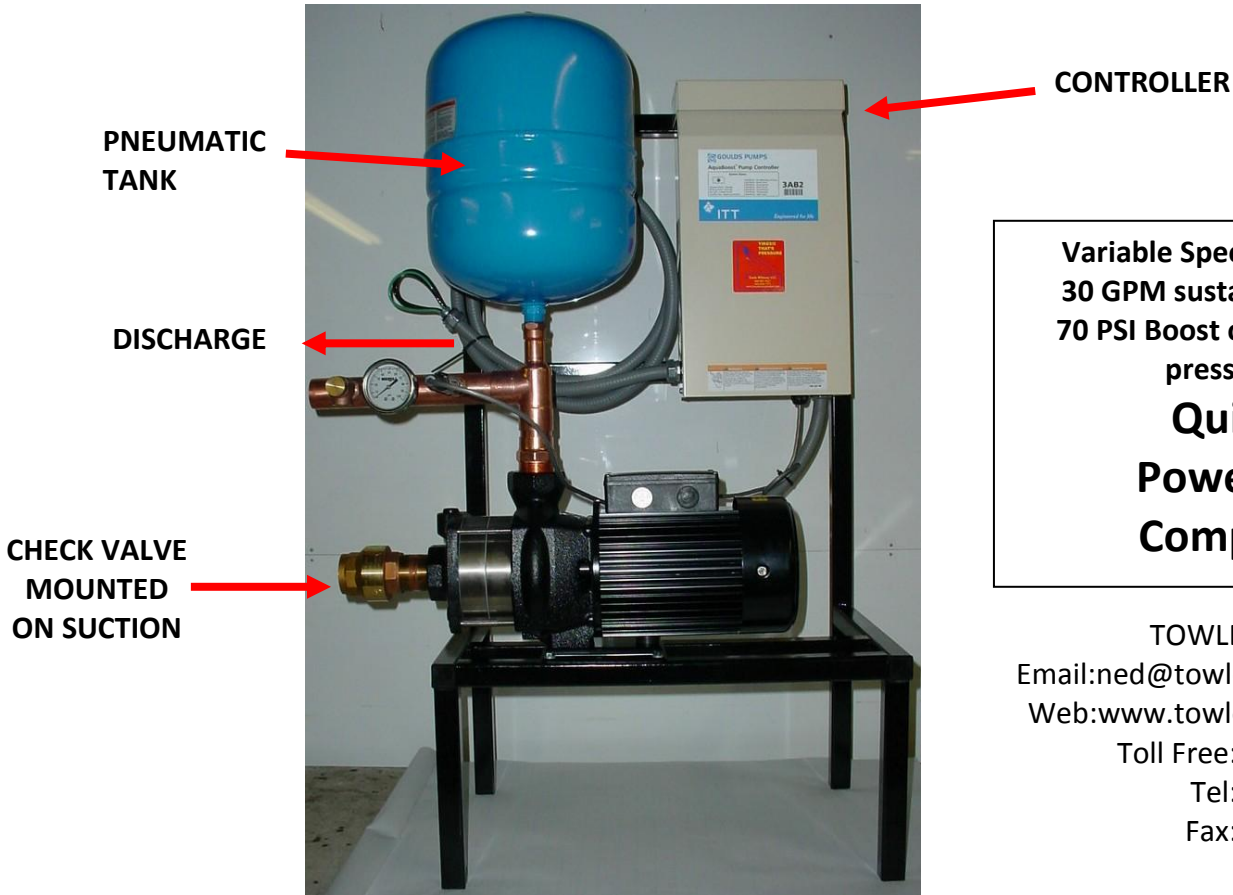

CONTROLLER

PNEUMATIC TANK

DISCHARGE

CHECK VALVE MOUNTED ON SUCTION

Variable Speed Capacity:
30 GPM sustained with a
70 PSI Boost over existing
pressure.

Quiet
Powerful
Compact

TOWLE WHITNEY LLC
Email: ned@towle-whitney.com
Web: www.towle-whitney.com
Toll Free: 800-807-9827
Tel: 603-626-7371
Fax: 603-626-7372

Frame Footprint: 24"W x 17"D x 43"H

Specifications:

Floor or Wall Mount

Pump Mfg: Walrus of America #8T-5K

Controller Mfg: Gould Pump Co. #3AB2

Assembler: Towle Whitney LLC

Power: 208-220V/1 Phase/30Amp

HP: 2 HP


Discharge: 1 1/2"

Suction: 1 1/2"

Flow Rate: 30 GPM

PSI Boost: 70 PSI

Some Assembly Required

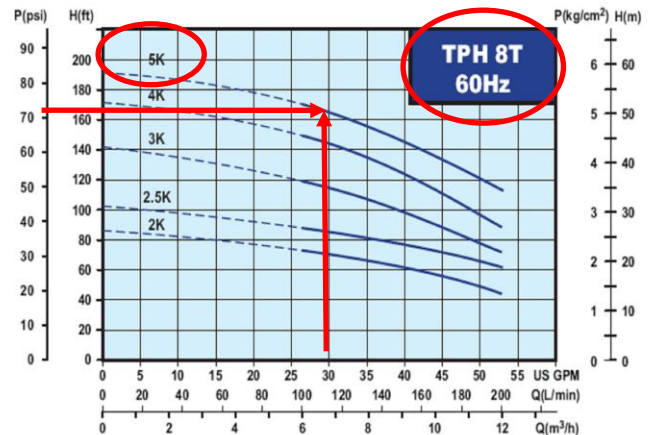

Actual system may vary from picture shown

Warranties are passed through and as published in the Original Equipment Manufacturer's literature that is included with this system. In no event shall Towle Whitney LLC be liable for incidental or consequential damages, or limitation on how long an implied warranty lasts. It being intended that purchaser's exclusive remedy is limited to replacement of defective products.