


# TW1000-50W-50 Booster Station

## Large Residential/Commercial

Applications: City – Well – Cistern – Irrigation – NFPA-13D

VARIABLE SPEED CRUISE CONTROL FEATURE  
PUMP WILL AUTOMATICALLY MAINTAIN DESIRED PRESSURE

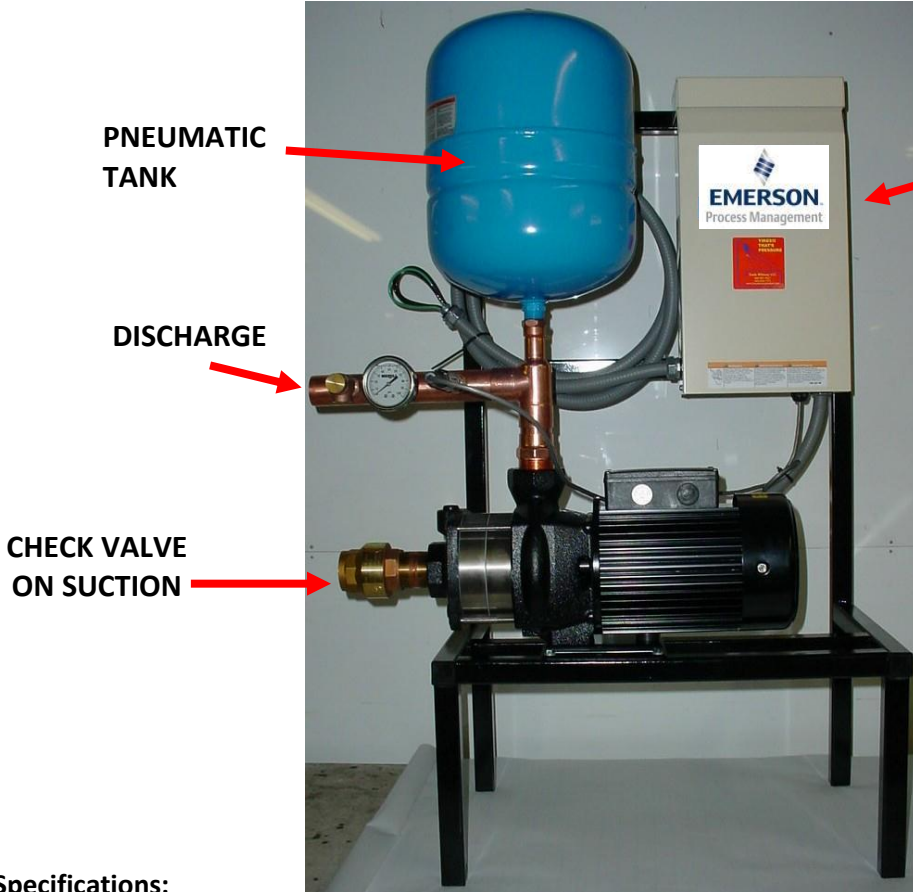

PNEUMATIC  
TANK

DISCHARGE

CHECK VALVE  
ON SUCTION

PAINTED STEEL  
FRAME

CONTROLLER

TOWLE WHITNEY LLC  
Email: [ned@towle-whitney.com](mailto:ned@towle-whitney.com)  
Web: [www.towle-whitney.com](http://www.towle-whitney.com)  
Toll Free: 800-807-9827  
Tel: 603-626-7371  
Fax: 603-626-7372

### Specifications:

Pump Mfg: Walrus of America #12T-3K **Footprint: 19"W x 19"D x 45"H**

Controller: Emerson or Equal

Assembler: Towle Whitney LLC

Power Options:

208-220V/1PH/30Amp

208-220V/3PH/15Amp

360-480V/3PH/15Amp

HP: 2 HP

Discharge: 1 1/2"

Suction: 1 1/2"


Flow Rate: 50 GPM

PSI Boost: 50 PSI

Tank: American AET-10

Some Assembly Required

Actual system may vary from picture shown

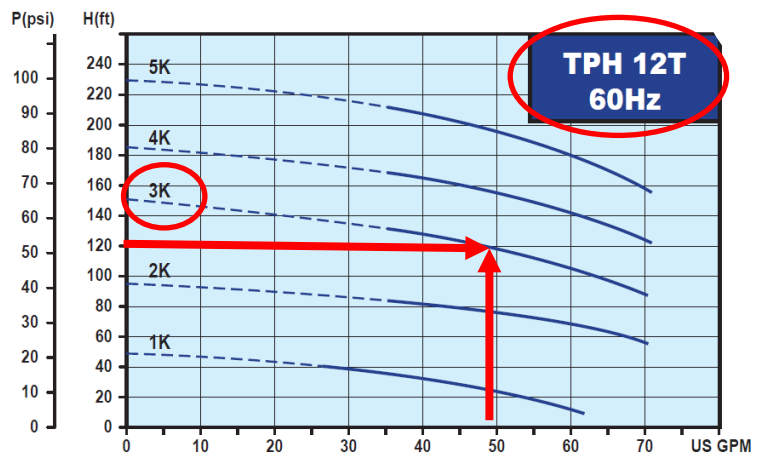

Warranties are passed through and as published in the Original Equipment Manufacturer's literature that is included with this system. In no event shall Towle Whitney LLC be liable for incidental or consequential damages, or limitation on how long an implied warranty lasts. It being intended that purchaser's exclusive remedy is limited to replacement of defective products. Water damage exclusion: It is understood that Towle Whitney LLC accepts no responsibility for water damage regardless of what or who caused water damage or any consequential personal injuries, liabilities or property damages resulting.