


# TW2000-100W-50 Booster Station

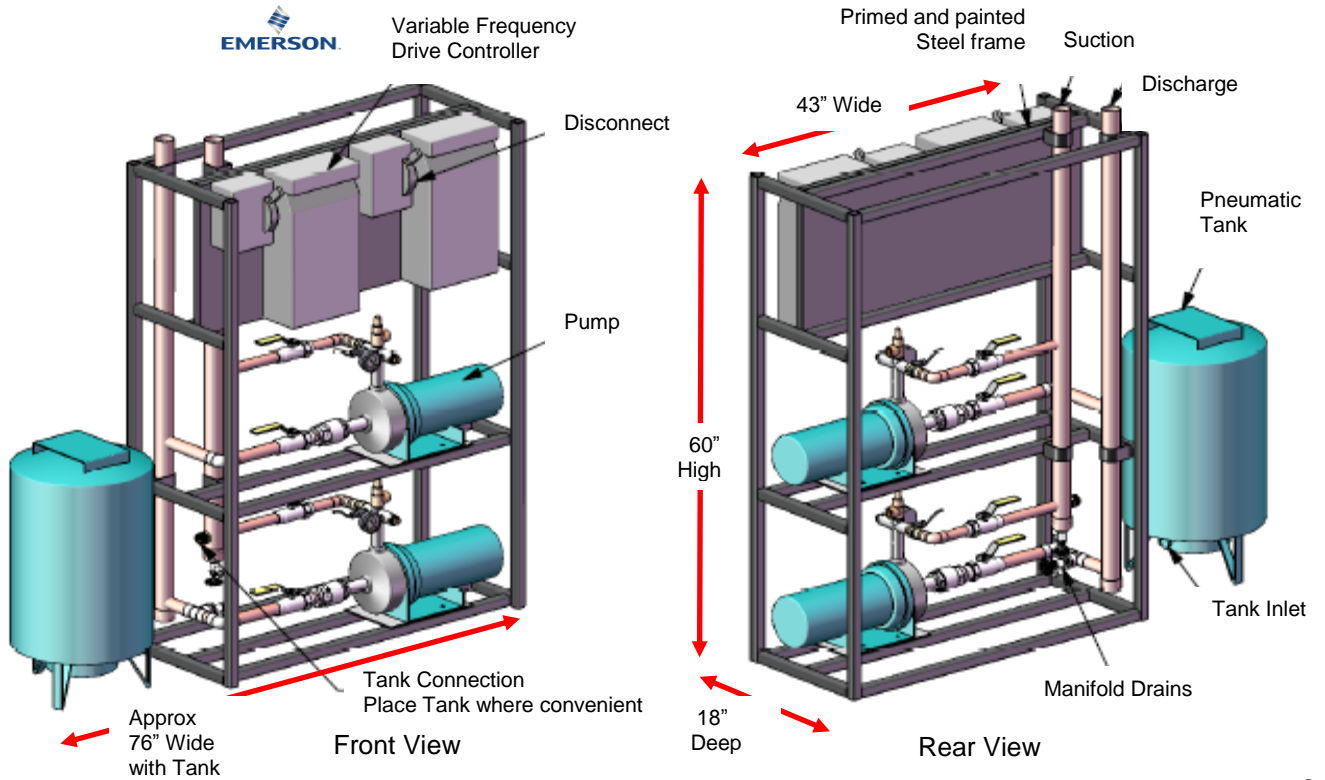


## Specifications:

Pump: Walrus of Amer. TPH8T-5K  
 Controller: Emerson SKDD200300  
 Assembler: Towle Whitney LLC  
 Power: 208-220V/3PH/20Amp  
 2 Independent circuits required  
 HP: 2 HP Per Pump  
 Flow Rate: 100 GPM Total Capacity  
 Boost: 50 PSI Overboost  
 Suction: 1 1/2"  
 Discharge: 1 1/2"  
 Manifolds: 3" Type L Copper  
 Roll Groove Ends  
 Tank: Flotec FP7110  
 Alarm Package by others

Some assembly required  
 Picture may vary from actual system

**SYSTEM CAPACITY**  
 100 GPM with a 50 PSI boost

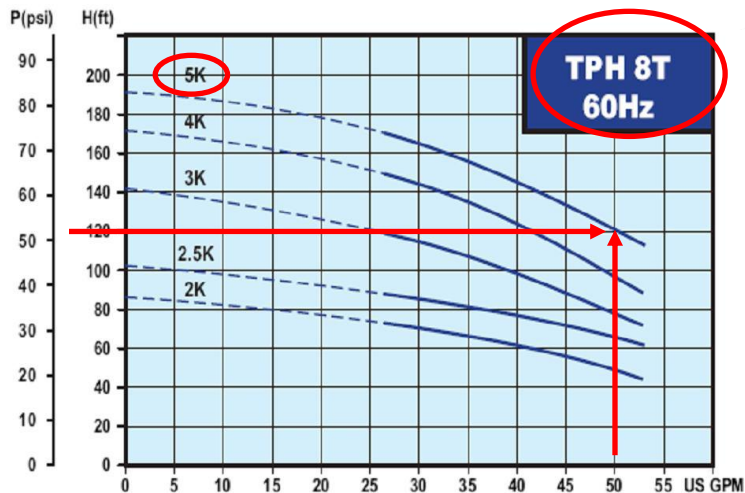

## TOWLE WHITNEY LLC

Email: [ned@towle-whitney.com](mailto:ned@towle-whitney.com)  
 Web: [www.towle-whitney.com](http://www.towle-whitney.com)  
 Toll Free: 800-807-9827  
 Tel: 603-626-7371  
 Fax: 603-626-7372

Warranties are passed through and as published in the Original Equipment Manufacturer's literature that is included with this system. In no event shall Towle Whitney LLC be liable for incidental or consequential damages, or limitation on how long an implied warranty lasts. It being intended that purchaser's exclusive remedy is limited to replacement of defective products. Water damage exclusion: It is understood that Towle Whitney LLC accepts no responsibility for water damage regardless of what or who caused water damage or any consequential personal injuries, liabilities or property damages resulting.