

TW 2000H-200W-40 BOOSTER STATION

Steel Frame Primed and Painted for Rust Protection



Controllers and Disconnect Boxes



Pneumatic Tank
Tank to be placed near the system




TOWLE WHITNEY LLC
 Email: ned@towle-whitney.com
 Web: www.towle-whitney.com
 Toll Free: 800-807-9827
 Tel: 603-626-7371
 Fax: 603-626-7372

Specifications:

- Pumps: Walrus of America
- Controller: Emerson
- Assembler: Towle Whitney LLC
- Power Options: 208-220V/3 PH/20Amp
or 360-480V/3PH/20Amp
- 2 Independent circuits required
- Pumps: TPH25T-3K
- HP: 5 HP per Pump
- Suction: 3" Flanged
- Discharge: 3" Flanged
- Flow Rate: 200 GPM Total Capacity
- Boost: 40 PSI
- Manifolds: 3" Type L Copper
- Headers: Horizontal Roll Grooved
- Tank: Flotec FP7125

37" W x 33"D x 60"H

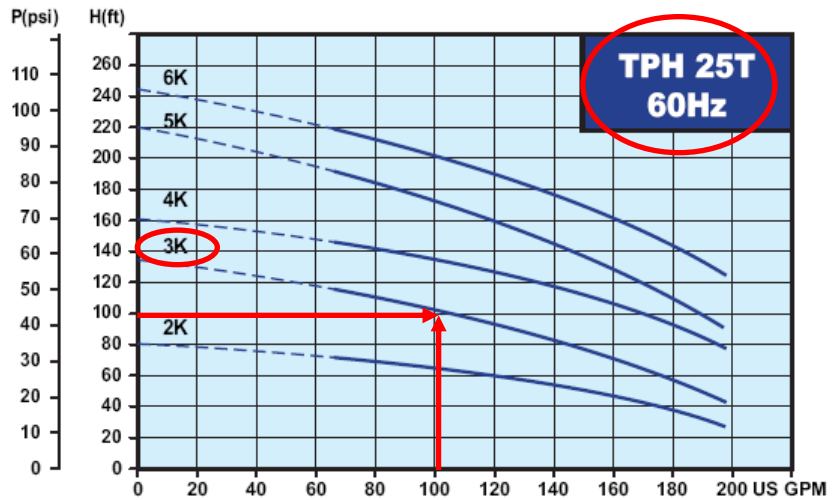

System may vary from picture shown
 Some assembly required

Warrantees are passed through and as published in the Original Equipment Manufacturer's literature that is included with this system. In no event shall Towle Whitney LLC be liable for incidental or consequential damages, or limitation on how long an implied warranty lasts. It being intended that purchaser's exclusive remedy is limited to replacement of defective products. Water damage exclusion: It is understood that Towle Whitney LLC accepts no responsibility for water damage regardless of what or who caused water damage or any consequential personal injuries, liabilities or property damages resulting.