

Towle whitney llc

TW2000U-100W-50 Duplex

The *TW2000U-100W-50 Duplex Booster System* is equipped with centrifugal pumps regulated by variable frequency drives that control pump operation to maintain constant pressure regardless of varying demand or fluctuation in incoming pressure. This system will supply 100 GPM with a 50 PSI overboost.

Features and Benefits:

- Commercial application
- Quiet, Compact & Powerful
- Variable Frequency Drive controlled pump
- Energy efficient operation
- Prewired & Factory Tested
- Lead/Lag & Alternation [Optional]
- BMS Compatibility [Optional]

Standard system components:

- Centrifugal Pumps
- VF drives
- Pressure transducers
- Disconnect boxes
- Pneumatic tank
- Pressure Gauges
- Relief valves
- Check valves
- Ball valves
- Steel frame




*All parts shown are included in the system
Actual system components may vary
Some assembly required*

Technical Specifications:

- Pump:** Walrus (TEFC motor) [8T-5K]
- Controller:** Emerson or equal
- Flow Rate:** 100 GPM Total
- Boost:** 50 PSI Overboost
- Horse Power:** 2 HP
- Manifold:** 3 inch
- Tank:** 20 Gallon [Flexcon]
- Frame Size:** 43.0"W x 60.0"H x 18.0"D
- Decibel rating:** <80 db @ 3500 RPM
- Power Options:** Independent circuit required
208-220V/1-3PH
360-480V/3 PH

Performance curve for each pump

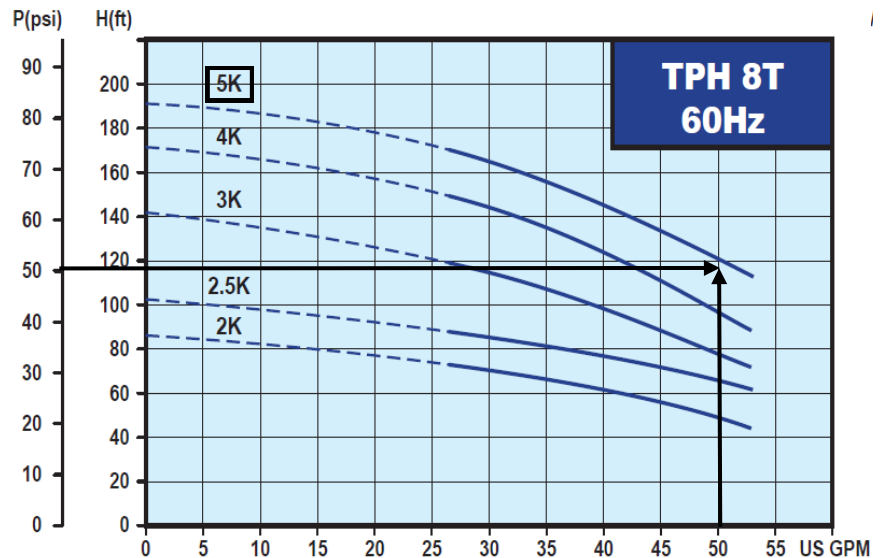

Minimum requirements:

- Adequate amount of water volume needed
- Water supply must be free of large impurities
- Booster system must not be run dry
- Pumps need flooded suction
- Pumps cannot lift water from an underground water storage tank
- Booster system must be protected from the elements
- Isolation valves must be installed before the suction and after the discharge manifolds of the booster system.

21 Londonderry Turnpike, Hooksett, NH 03106

Tel: 603-626-7371/1-800-807-9827 Fax: 603-626-7372 www.towle-whitney.com info@towle-whitney.com